

Ø 160 mm, SINGLE INLET (FORWARD CURVED)

AC BLOWER





Features

- **Impeller material:** galvanized steel
- **Casing material:** die-cast aluminium
- **Direction of rotation:** clockwise, seen on rotor
- **Type of protection:** IP44
- **Insulation class:** B, F
- **Mode of operation:** continuous operation (S1)
- **Bearing:** ball bearings
- **Motor protection:** self-resetting TOP wired internally



Technical data

Model	Perform. curve	Nominal voltage [VAC]	Frequency [Hz]	Speed [RPM]	Power input max [W]	Current max [A]	Sound pres. level [dBA]	Perm. amb. temp. [°C]	Capacitor [µF/VDB]	Electrical connection
SL-F160A-4E-B01-11	I	230	50	1340	73	0.33	66	-25 ... +50	1.5/450	A
	II	230	60	1600	85	0.37	68	-25 ... +50	1.5/450	A
SL-F160A-2E-D01-11	III	230	50	2660	353	1.55	71	-25 ... +50	6.0/450	A

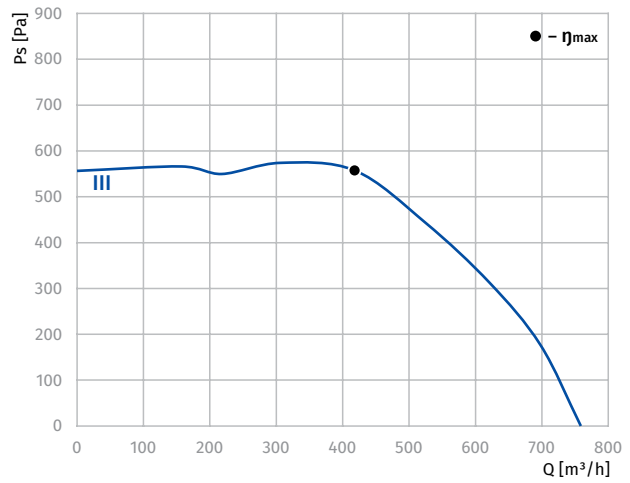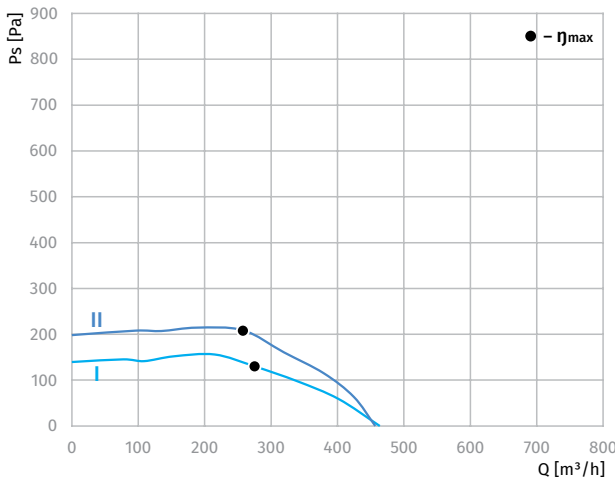

Overall dimensions

