

Ø 250 mm, BACKWARD CURVED

AC CENTRIFUGAL FAN





Features

- Impeller material: PA plastic + 30 % glass fiber
- Direction of rotation: clockwise, seen on rotor
- Type of protection: IP44
- Insulation class: B
- Mode of operation: continuous operation (S1)
- Bearing: ball bearings
- Motor protection: self-resetting TOP wired internally



Technical data

Model	Perform. curve	Nominal voltage [VAC]	Frequency [Hz]	Speed [RPM]	Power input max [W]	Current max [A]	Sound pres. level [dBA]	Perm. amb. temp. [°C]	Capacitor [µF/VDB]	Electrical connection
BL-B250A-2E-C01-01	I	230	50	2400	150	0.65	70	-25 ... +50	3.0/450	A
	II	230	60	2300	190	0.83	69	-25 ... +50	3.0/450	A
BL-B250A-2E-D01-01	III	230	50	2500	165	0.71	72	-25 ... +50	4.0/450	A
	IV	230	60	2600	220	0.97	70	-25 ... +50	4.0/450	A

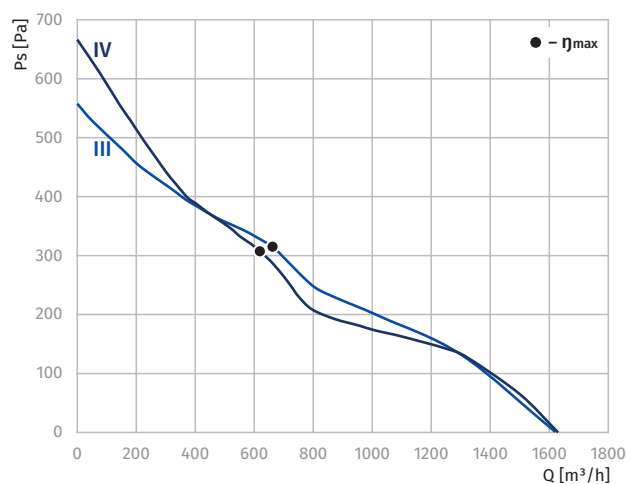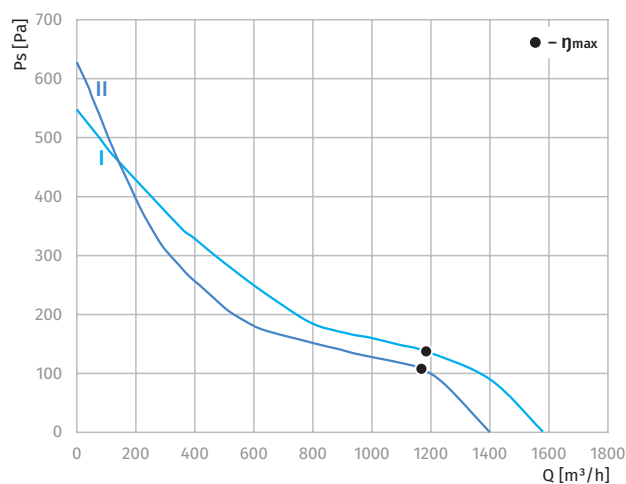

Overall dimensions

