


PRODUCT SPECIFICATION



TYPE	AC centrifugal fan, backward curved, with housing (Plug Fan)
MODEL	GL-B250A-2C-D01-01

NOMINAL DATA

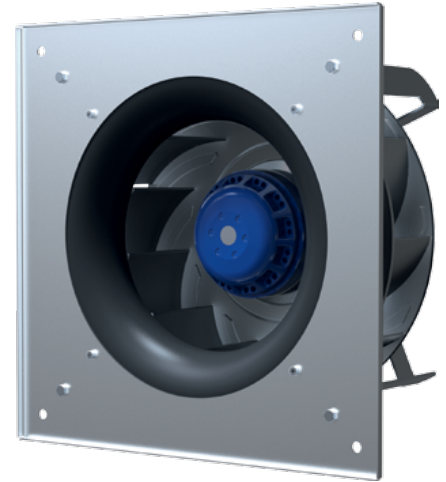


Phase	-	1~
Nominal Voltage	VAC	120
Frequency	Hz	60
Speed	RPM	3200
Power Input	W	340
Current	A	2.9
Sound Pressure Level	dBA	79
Capacitor	μF	25
Capacitor Voltage	VDB	250
Valid For Approval/Standard		CE
Min. Ambient Temperature	°C	-25
Max. Ambient Temperature	°C	+40

TECHNICAL FEATURES

Mass	3.95 Kg
Dimensions	250 mm
Material Of Impeller	PA plastic + 30% glass fiber+galvanized steel
Material Of Housing	Sheet steel, painted grey
Number Of Blades	11
Direction Of Rotation	Clockwise, seen on rotor
Surface Of Rotor	Coated in reflex BLUE C
Type of protection	IP44
Insulation Class	F
Condensate Discharge Holes	On rotor side
Min./Max. permissible ambient motor temperature (transportable/ storage)	- 40°C ... + 80°C
Operation Mode	S1
Motor Bearing	Ball bearing
Motor Protection	Self-resetting TOP wired internally
Length Of Cable	450 mm
RoHS	All material accord with RoHS
Min./Max. Humidity	0% ... 90% RH
Motor	External rotor AC motor
Deviation Of Impeller In Axial Direction	≤1.0mm
Deviation Of Impeller In Radial Direction	≤1.0mm

PERFORMANCE CURVES

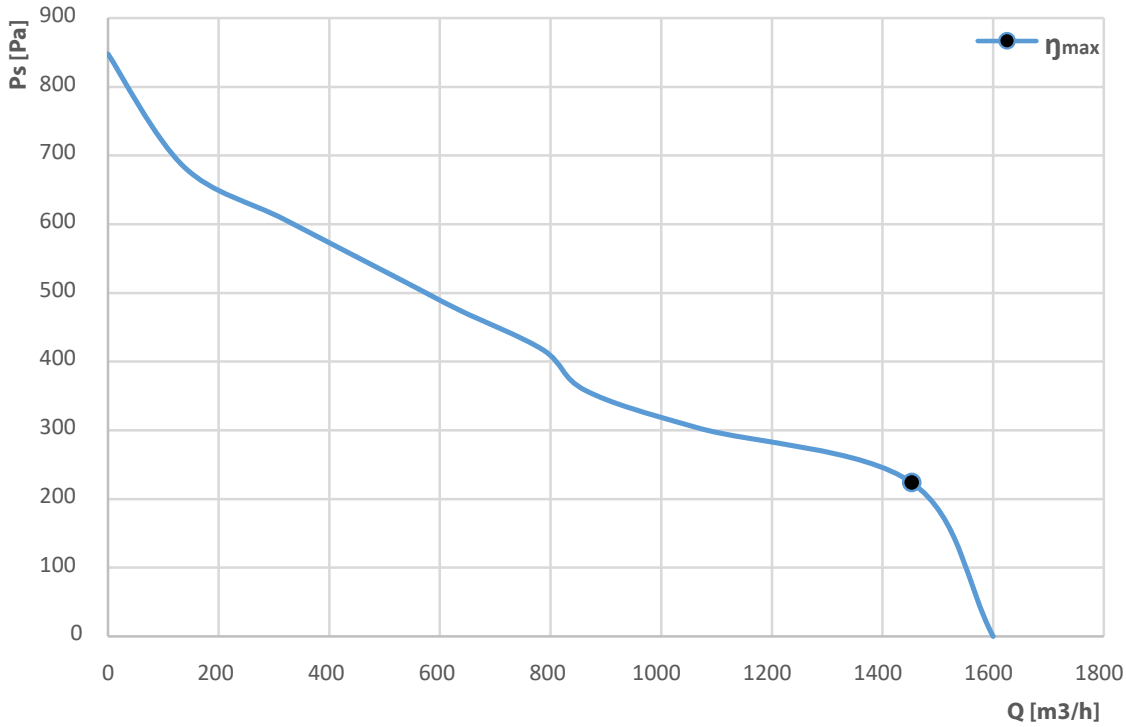


DATA ACCORDING TO ErP DIRECTIVE

Installation category	A
Efficiency category	Static
Variable speed drive	No
Specific ratio	1,00

	Actual	Request 2015
Overall efficiency η_{es}	30	46
Efficiency grade N	46	62
Power input P, W	303	
Air flow V, m ³ /h	1453	
Pressure increase ΔP , Pa	224	

ELECTRICAL CONNECTION DIAGRAMM

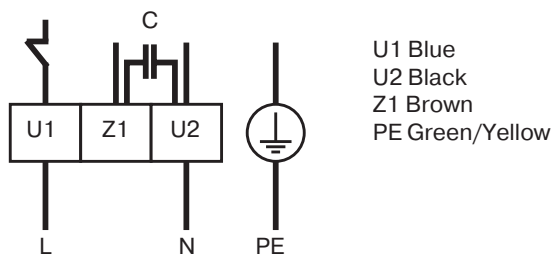

DIMENSIONS DRAWING

