

PRODUCT SPECIFICATION



TYPE	AC centrifugal fan, backward curved
MODEL	BL-B250C-2E-M01-01

NOMINAL DATA




Phase	-	1~	1~
Nominal Voltage	VAC	230	230
Frequency	Hz	50	60
Speed	RPM	2900	3400
Power Input	W	269	387
Current	A	1.30	1.70
Sound Pressure Level	dBA	70	71
Capacitor	μF	5.0	5.0
Capacitor Voltage	VDB	450	450
Valid For Approval/Standard		CE	CE
Min. Ambient Temperature	°C	-25	-25
Max. Ambient Temperature	°C	+60	+60

TECHNICAL FEATURES

Mass	3 Kg
Dimensions	250 mm
Material Of Impeller	PA plastic+30% glass fiber
Number Of Blades	7
Direction Of Rotation	Clockwise, seen on rotor
Surface Of Rotor	Coated in reflex BLUE C
Type of protection	IP44
Insulation Class	F
Condensate Discharge Holes	On rotor side
Min./Max. permissible ambient motor temperature (transportable/ storage)	- 40°C ... + 80°C
Operation Mode	S1
Motor Bearing	Ball bearing
Motor Protection	Self-resetting TOP wired internally
Length Of Cable	450 mm
RoHS	All material accord with RoHS
Min./Max. Humidity	0% ... 90% RH
Motor	External rotor AC motor
Deviation Of Impeller In Axial Direction	≤1mm
Deviation Of Impeller In Radial Direction	≤1mm

PERFORMANCE CURVES

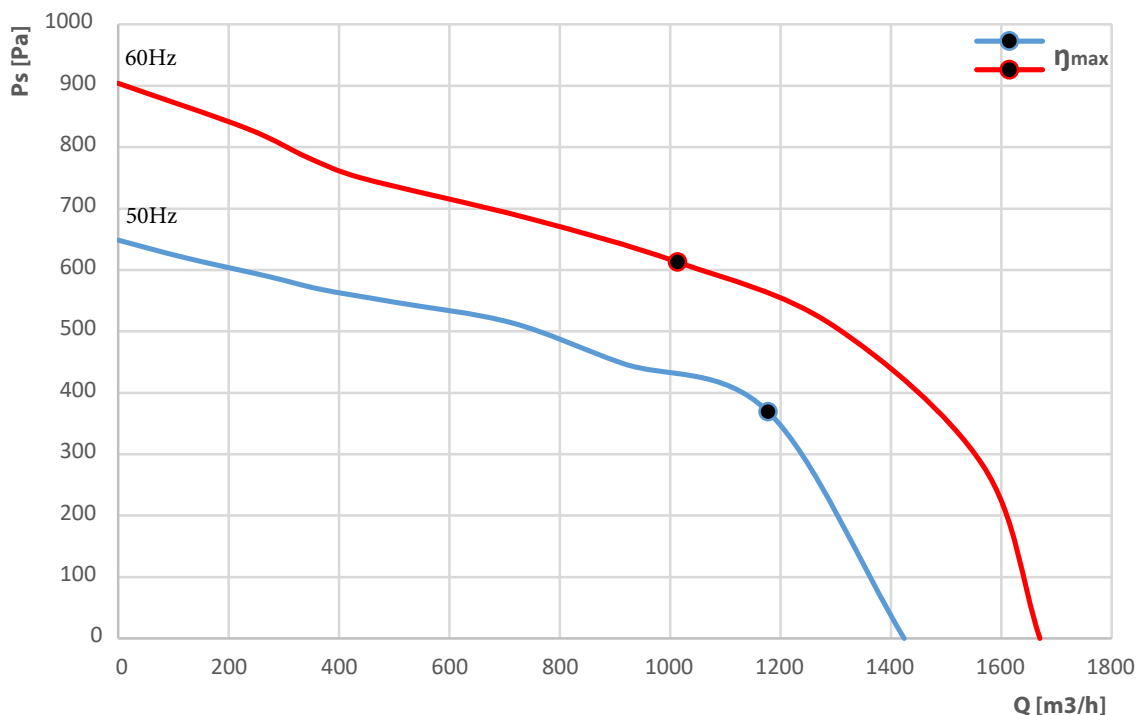


DATA ACCORDING TO ErP DIRECTIVE

Installation category	A
Efficiency category	Static
Variable speed drive	No
Specific ratio	1,00

	Actual	Request 2015
Overall efficiency η_{es}	46	46
Efficiency grade N	62	62
Power input P, W	269	
Air flow V, m ³ /h	1180	
Pressure increase ΔP , Pa	374	

ELECTRICAL CONNECTION DIAGRAMM

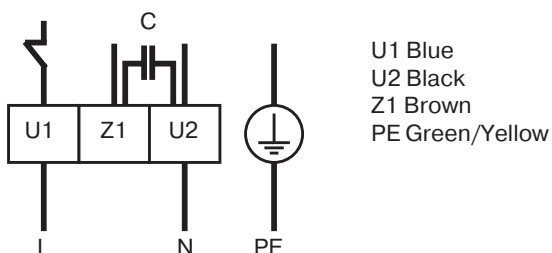

DIMENSIONS DRAWING

